









RETAINING WALL

ITEM		CODE	DIMENSIONS	WEIGHT PER UNIT	UNITS PER PALLET	WEIGHT PER PALLET
PanoMur Wall 6" Curved Split Face		8PW	6"H x 16"W x 12"D	49#	45	2205#
PanoMur Wall 6" Straight Split Face		8PWS	6"H x 16"W x 12"D	49#	45	2205#
PanoMur Caps - Split		8PC	3"H x 16"W x 12"D	47#	60	2850#
PanoMur Corner Units		8PQ	6"H x 16"W x 8"D	60#	36	2160#

Core fill with crushed aggregate. To figure quantity: Sq.Ft. of wall ÷ .67 = number of units needed.

INSIDE & OUTSIDE CORNER DETAILS

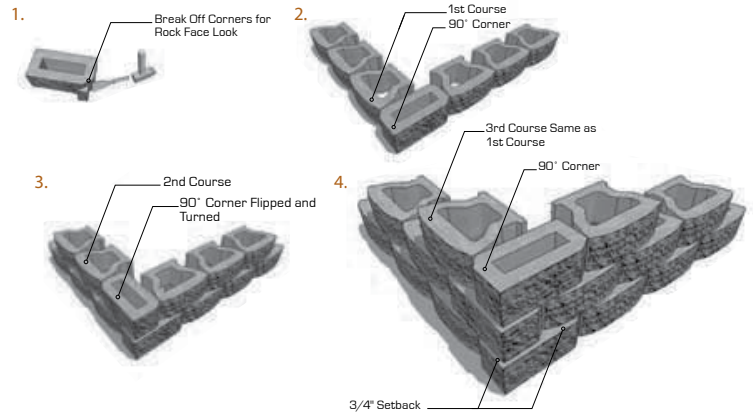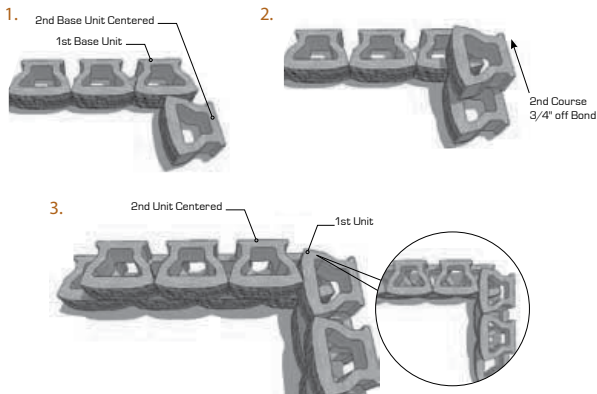


Note: PanoMur® has a 6° batter



RETAINING WALL

OUTSIDE CURVES

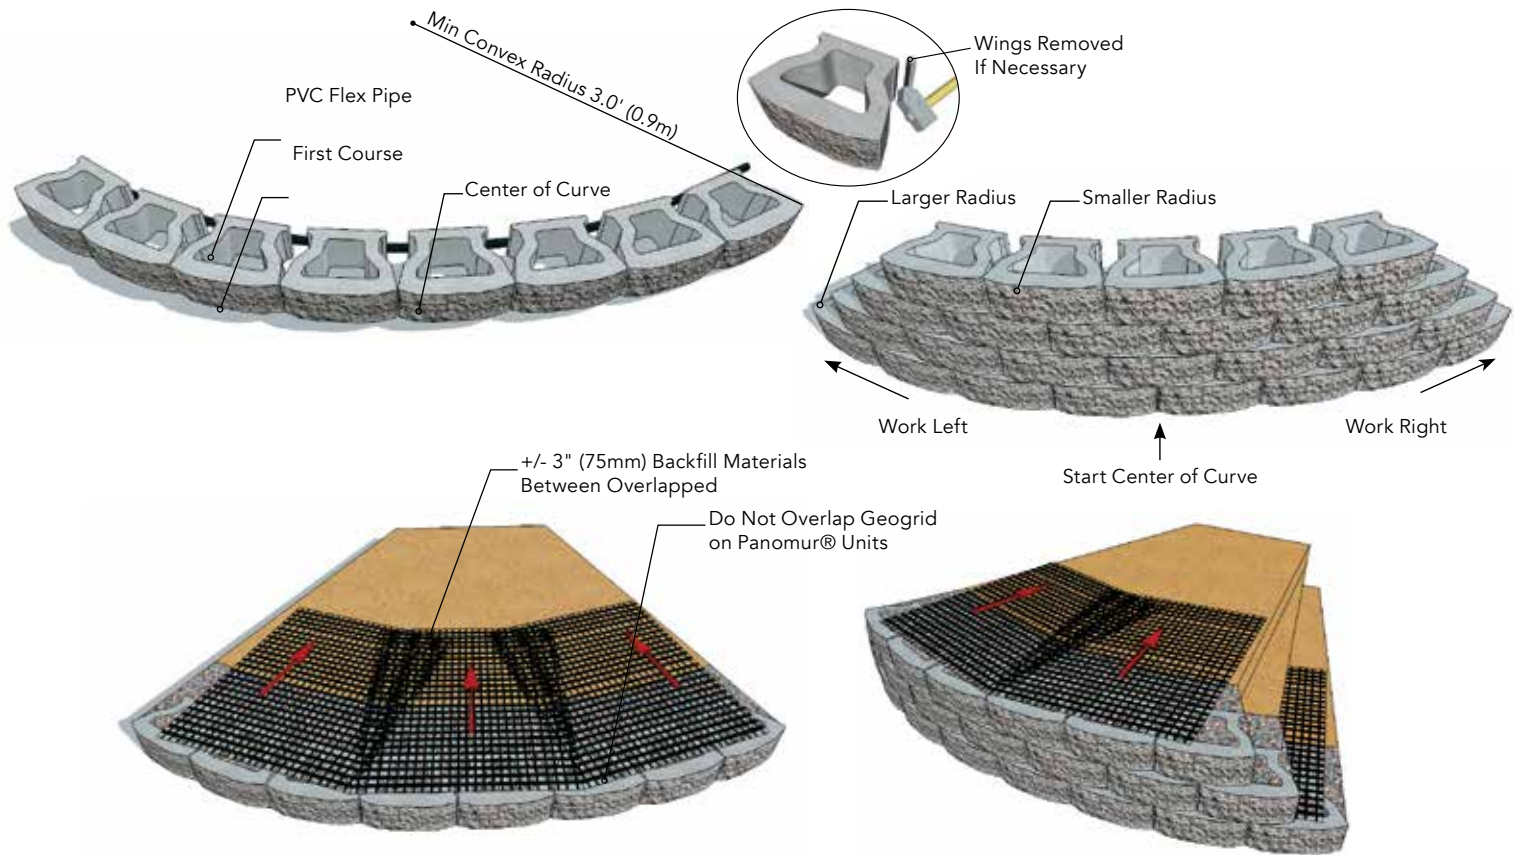

SMALLEST CIRCLE DIMENSIONS



Standard PanoMur® Full Unit Circle

15 Units Total
Diameter
 6½ ft outside diameter
 4½ ft inside diameter
Radius
 3¼ ft outside radius
 2¼ ft inside radius
These measurements are nominal



PanoMur® Unit Circle with Handhelds Removed

12 Units Total
Diameter
 5½ ft outside diameter
 3½ ft inside diameter
Radius
 2¾ ft outside radius
 1¾ ft inside radius
These measurements are nominal