







## INTERLOCKING CONCRETE PAVEMENT SYSTEM (ICP)

### DURABLE FLEXIBLE PAVEMENT SYSTEM

STYLE		CODE	DIMENSIONS	CUBES
<b>Double Holland™</b> <b>8" x 8"</b> <i>*NOT SOLD BY THE BAND</i>		<b>4DH</b>	200mm x 200mm x 60mm Approximate 7 <sup>7</sup> / <sub>8</sub> " x 7 <sup>7</sup> / <sub>8</sub> " x 2 <sup>3</sup> / <sub>8</sub> " (PSF = 2.25 stones @ 28#)	94 SF 2632# (216 pcs)
<b>Holland Stone Square™</b> <b>12" x 12"</b> <i>*NOT SOLD BY THE BAND</i>		<b>4HQ</b>	300mm x 300mm x 60mm Approximate 11 <sup>7</sup> / <sub>8</sub> " x 11 <sup>7</sup> / <sub>8</sub> " x 2 <sup>3</sup> / <sub>8</sub> " (PSF = 1 Stone @ 28#)	112 SF 3136# (112 pcs)
<b>Holland II™</b> <b>4" x 8"</b> <i>*NOT SOLD BY THE BAND</i>			100mm x 200mm Approximate 3 <sup>7</sup> / <sub>8</sub> " x 7 <sup>7</sup> / <sub>8</sub> " (PSF = 4.5 stones @ 28#)	<b>4HT - 60mm Height</b> 94 SF 2632# (432 pcs) <b>4HT8 - 80mm Height</b> 64 SF 2272# (288 pcs)
<b>Holland Stone™ - 70mm</b> <b>4" x 8"</b> <i>*NOT SOLD BY THE BAND</i>		<b>4H7</b>	100mm x 200mm x 70mm Approximate 3 <sup>7</sup> / <sub>8</sub> " x 7 <sup>7</sup> / <sub>8</sub> " x 2 <sup>3</sup> / <sub>4</sub> " (PSF = 4.5 stones @ 32.5#)	80 SF 2600# (360 pcs)

### BENEFITS OF ICP

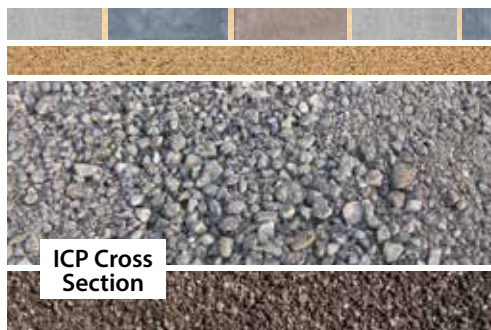
- Flexible system, does not crack or heave in cold climates
- Easier maintenance to the pavement and utilities underneath
- Achieve endless design possibilities with different shapes, textures, colors and laying patterns
- Use pavers to delineate lines and spaces to eliminate the need to maintain paint
- Suitable for a range of applications: plazas, walkways, driveways, roads, etc.
- Borgert pavers are made with granite, creating a dense, resistant wearing course



## INTERLOCKING CONCRETE PAVEMENT SYSTEM (ICP)

### COMPOSITION & MANUFACTURE

#### Typical Cross Section of Concrete Paving Stone



- > **Borgert Pavers**
- > **Bedding Sand 1" Thick (ASTM C33)**
- > **Compacted Aggregate Base Class 2 or Class 5**  
*(Thickness depends on soil condition and application)*
- > **Compacted Soil Subgrade**

*Prior to screeding the bedding sand, the base surface tolerance must not exceed +/-1/4 in. (+/-6mm) over a 10gt. (3m) straight edge.*

Edge restraint detail provided based on application.

- Pavers exceed industry standards: 8,000 psi - 5% absorption
- Meets or exceeds ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67
- Manufactured with type A aggregates
- Associated with a range of LEED credits
- ADA Compliant

*Written detailed specification information is available, call or visit our website at [borgertproducts.com](http://borgertproducts.com).*

### LAYING PATTERNS

