






INTERLOCKING CONCRETE PAVEMENT SYSTEM (ICP)


DURABLE FLEXIBLE PAVEMENT SYSTEM

STYLE		CODE	DIMENSIONS	BANDS	CUBES
Classic Half Rectangle 4" x 6"		4SM	104mm x 173mm x 70mm Approximate 4 $\frac{1}{4}$ " x 6 $\frac{3}{4}$ " x 2 $\frac{3}{4}$ " (PSF = 5.06 stones @ 31.5#)	4.75 SF 155# (24 stones)	52.2 SF 1696# (11 bands)
Classic Rectangle 6" x 8"		4ST	173mm x 208mm x 70mm Approximate 6 $\frac{3}{4}$ " x 8 $\frac{1}{4}$ " x 2 $\frac{3}{4}$ " (PSF = 2.53 stones @ 31.5#)	9.49 SF 309# (24 stones)	66.4 SF 2160# (7 bands)
Classic Large Rectangle 8" x 13"		4SP	208mm x 348mm x 70mm Approximate 8 $\frac{1}{4}$ " x 13 $\frac{5}{8}$ " x 2 $\frac{3}{4}$ " (PSF = 1.28 stones @ 31.5#)	9.38 SF 305# (12 stones)	56.3 SF 1830# (6 bands)

ATTENTION: CLASSIC PAVERS DO NOT HAVE SPACE BARS. LAY PAVERS LOOSELY WITH 1/16" JOINT TO ENABLE ADJUSTMENTS TO MAINTAIN STRAIGHT LINES & MINIMIZE ADDITIONAL CHIPPING OVER THE LIFE OF THE PAVEMENT. 8" x 13" and 4" x 6" need to run lengthwise perpendicular to the 6" x 8".

COMPOSITION & MANUFACTURE

Typical Cross Section of Concrete Paving Stone

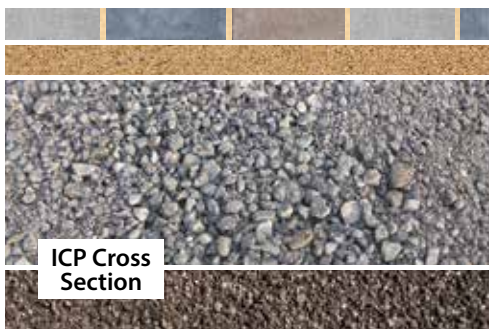

Edge restraint detail provided based on application.

- Borgert Pavers**
- Bedding Sand 1" Thick (ASTM C33)**
- Compacted Aggregate Base Class 2 or Class 5**
(Thickness depends on soil condition and application)
Prior to screeding the bedding sand, the base surface tolerance must not exceed +/-1/4 in.(+/-6mm) over a 10gt. (3m) straight edge.
- Compacted Soil Subgrade**

- Pavers exceed industry standards: 8,000 psi - 5% absorption
- Meets or exceeds ASTM C-936 and freeze-thaw testing per section 8 of ASTM C-67
- Manufactured with type A aggregates
- Associated with a range of LEED credits
- ADA Compliant

Written detailed specification information is available, call or visit our website at borgertproducts.com.




INTERLOCKING CONCRETE PAVEMENT SYSTEM (ICP)


BENEFITS OF ICP

- Flexible system, does not crack or heave in cold climates
- Easier maintenance to the pavement and utilities underneath
- Achieve endless design possibilities with different shapes, textures, colors and laying patterns
- Use pavers to delineate lines and spaces to eliminate the need to maintain paint
- Suitable for a range of applications: plazas, walkways, driveways, roads, etc.
- Borgert pavers are made with granite, creating a dense, resistant wearing course


LAYING PATTERNS




(A) 1 Piece
8x13 - 100%




(B) 1 Piece
6x8 - 100%




(C) 1 Piece
4x6 - 100%




(D) 2 Piece
4x6 - 34%
6x8 - 66%
Laying Ratio: 1:1




(E) 2 Piece
4x6 - 34%
6x8 - 66%
Laying Ratio: 1:1




(F) 2 Piece
4x6 - 34%
6x8 - 66%
Laying Ratio: 2:2




(G) 3 Piece Random
4x6 - 15%
6x8 - 28%
8x13 - 57%
Laying Ratio: 1:1:1




(H) 3 Piece
4x6 - 9%
6x8 - 17%
8x13 - 74%
Laying Ratio: 1:1:2




(I) 3 Piece
4x6 - 15%
6x8 - 28%
8x13 - 57%
Laying Ratio: 1:1:1



(J) 3 Piece
4x6 - 24%
6x8 - 24%
8x13 - 52%
Laying Ratio: 4:2:2



(K) 3 Piece
4x6 - 15%
6x8 - 28%
8x13 - 57%
Laying Ratio: 1:1:1



(L) 2 Piece
4x6 - 60%
6x8 - 40%
Laying Ratio: 6:2